


Connection diagram

Use a RJ-11 plug for modul regulators with COM-Base.
With an existing interface module COM-A, there may be noise disturbance.
Denem Interface Module COM-A, there may be noise disturbance.
In this case, remove the communication module from COM-A.

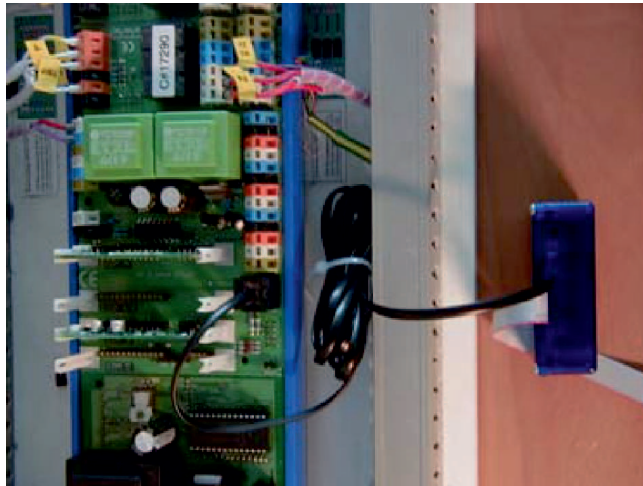

On controllers of the series 1.x (T-Print) the additional interface adapter has to be connected to the four-bus-terminals and then connect the flat cable there.

cConnection diagram:

26-TX + >> blue wire

27-TX - >> black wire

28-RX + >> orange core

29 RX - >> gray wire

